




# iMac G4 17 800 MHz EMC 1936 Bottom Plate Replacement

Remove first bottom plate

Written By: David Hunter

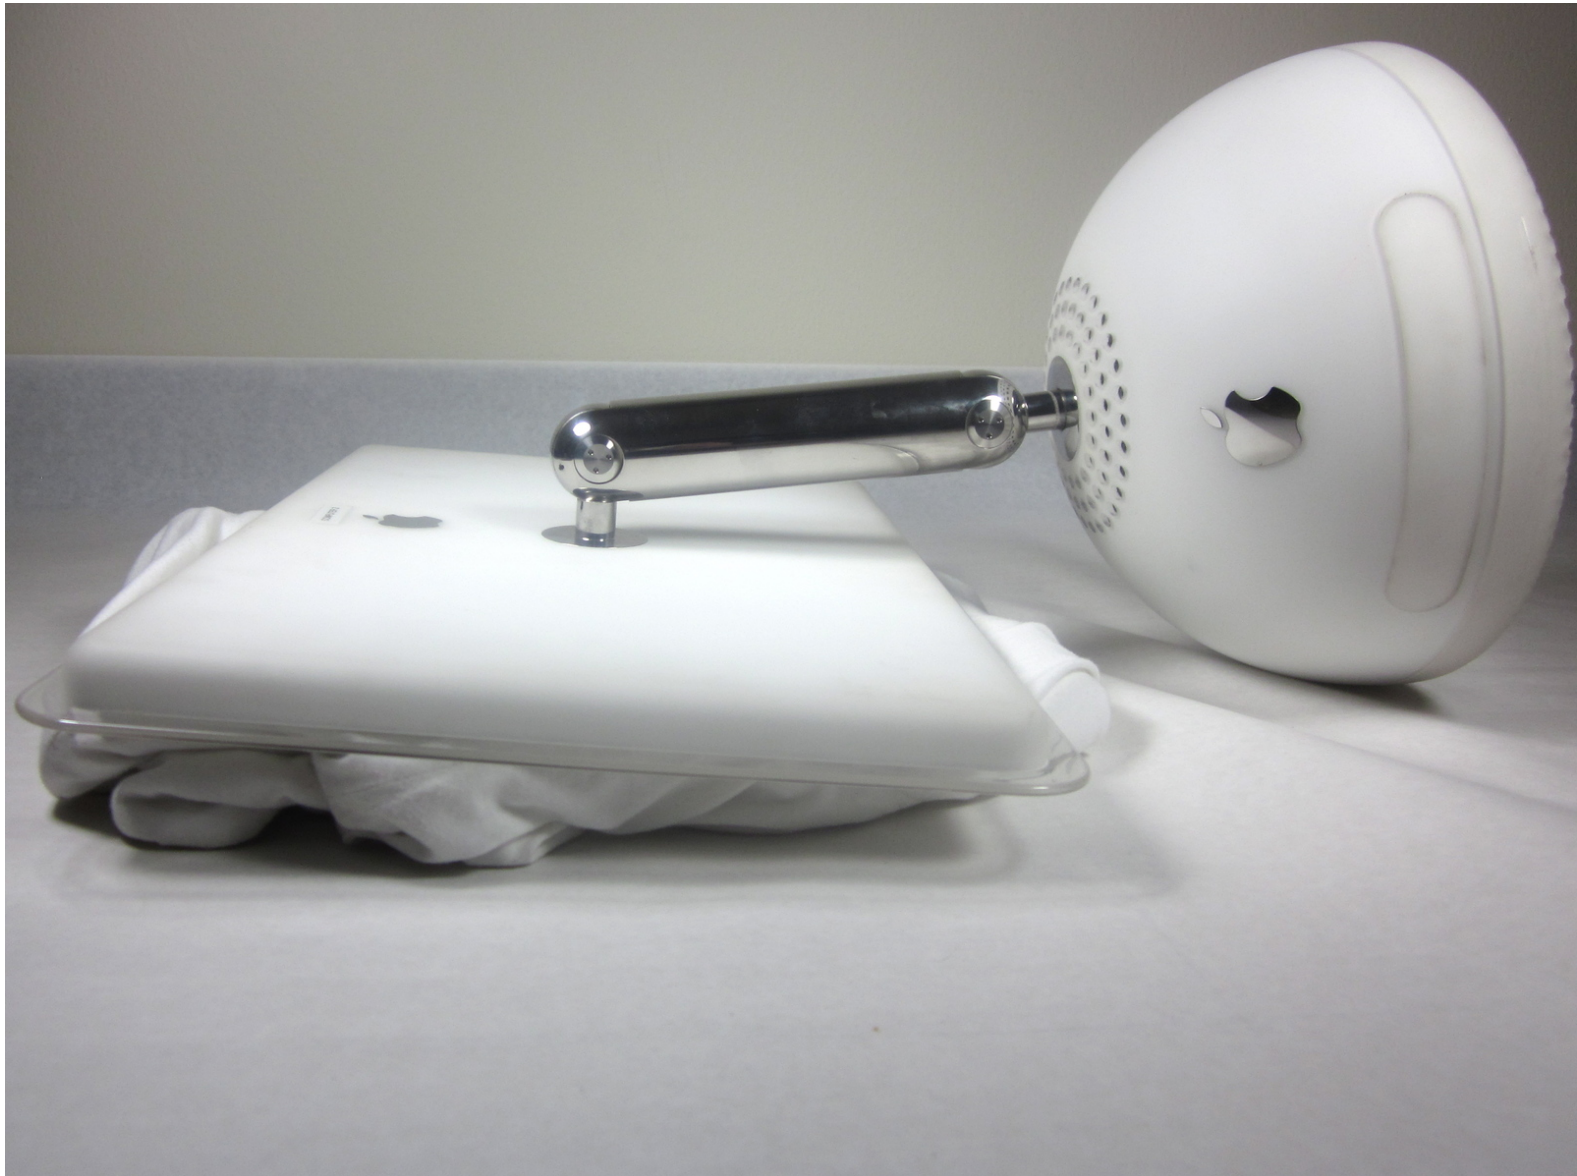

## INTRODUCTION

Removing the first bottom plate will reveal the bottom housing, RAM, and airport card.


---



### TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-

## Step 1 — Bottom Plate

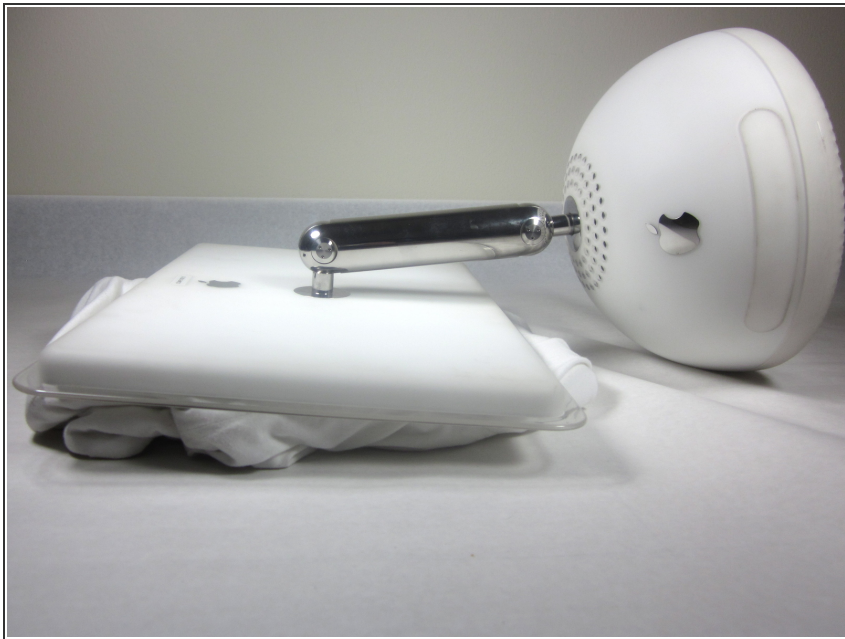

- Unplug all the cables from the computer, including the power cable. Lay the computer face-down, supporting the neck and base with a soft cloth under the screen.

## Step 2



- Loosen the four Phillips #0 screws.

## Step 3



- Carefully remove the base access panel.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-15 09:43:24 AM.